

CD1050 Dynamic Rotary Torque Sensor



- Square Male Couplings
- Range from ± 5 to $\pm 7,000$ Nm (± 4 to $\pm 5,600$ lbf.ft)
- Stainless Steel
- Cable Gland or Connector Output
- Built In Amplifier per Request

DESCRIPTION

The CD1050 Series has been developed to be mounted on rotating shafts for rotary torque measurements. Constructed in stainless steel, the sensor is suitable for use in many hostile environments. Fitted with metallic strain gauges in a Wheatstone bridge circuit, the CD1050 is providing excellent temperature stability. For high-level output a model with integrated amplifier is available.

With many years of experience as a designer and manufacturer of sensors, Measurement Specialties, Inc. often works with customers to design or customize sensors for specific uses and testing environments.

To meet your needs we also offer complete turnkey systems. The matched components (sensor, power, amplifier and digital display) are formatted, calibrated and ready for immediate use.

FEATURES

- Ranges from: ± 5 Nm to $\pm 7,000$ Nm (± 4 lbf. ft to $\pm 5,600$ lbf. ft)
- For Dynamic Applications
- Square Male Couplings
- High Level Output Model with Integrated Amplifier

APPLICATIONS

- Dynamic applications
- Process control equipment
- Test and Measurement
- Robotics and effectors
- Laboratory and Research

STANDARD RANGES

F.S range in Nm	5 - 10 - 20 - 50 - 100	150 - 200 - 300	500 - 750	1k - 2k - 3k	4k - 5k - 7k
F.S range in lbf-ft	4 - 8 - 16 - 40 - 80	120 - 160 - 240	400 - 600	800 - 1,6k - 2,4k	3,2k - 4k - 5,6k
Stiffness in Nm/rad	$1,4 \cdot 10^2$ to $7,5 \cdot 10^3$	$7,5 \cdot 10^3$ to $3 \cdot 10^4$	$3 \cdot 10^4$ to $1 \cdot 10^5$	$1 \cdot 10^5$ to $4,5 \cdot 10^5$	$4,5 \cdot 10^5$ to $1,3 \cdot 10^6$
Stiffness in lbf.ft/rad	$0,1 \cdot 10^2$ to $5,1 \cdot 10^2$	$5,1 \cdot 10^2$ to $2,1 \cdot 10^3$	$2,1 \cdot 10^3$ to $6,9 \cdot 10^3$	$6,9 \cdot 10^3$ to $3,1 \cdot 10^4$	$3,1 \cdot 10^4$ to $8,9 \cdot 10^4$
Rotation in rpm	3000	2200	1750	1250	1000

CD1050 Dynamic Rotary Torque Sensor

PERFORMANCE SPECIFICATIONS

All values are typical at temperature 20±1° C

Parameters	
Operating Temperature Range (OTR)	-20 to 80° C (-4 to 176° F)
Compensated Temperature Range (CTR)	0 to 60° C (32 to 140° F)
Zero Shift in CTR	<0.5% F.S./ 50° C [100° F]
Sensitivity Shift in CTR	<1% of reading / 50° C [100° F]
Range (F.S.)	±5 Nm to ±7 kNm [4 lbf-ft to 5,6 klf-ft]
Velocity of Rotation	Up to 3000 RPM ; Bidirectional operation
Over-Range	
Save Overload	1.5 x F.S.
Ultimate Load	3 x F.S.
Accuracy	
Combined Non-Linearity & Hysteresis	<±0.25% F.S

Electrical Characteristics


Model	CD1050	CD1050-A1	CD1050-A2
Supply Outage	10Vdc	10 – 30Vdc	±15Vdc (±12 to ±18Vdc)
F.S. Output	±2mV/V	±2V ±5% F.S	±5V ±5% F.S
Zero Offset	<±5% F.S.	2.5V ±5% F.S.	0V ±5% F.S.
Input Impedance/Consumption	350 to 700Ω	<50mA	<50mA
Output Impedance	350 to 700Ω	<10Ω	<10Ω
Insulation under 50Vdc	≥100MΩ	≥100MΩ	≥100MΩ

Notes

1. Electrical Termination: Connector output including mate
2. Material: Body in stainless steel ; aluminum alloy housing.
3. Other connection types on request (smooth shaft, cotter pin, etc.)


CD1050 Dynamic Rotary Torque Sensor

DIMENSIONS & WIRING SCHEMATIC (IN METRIC AND IMPERIAL)

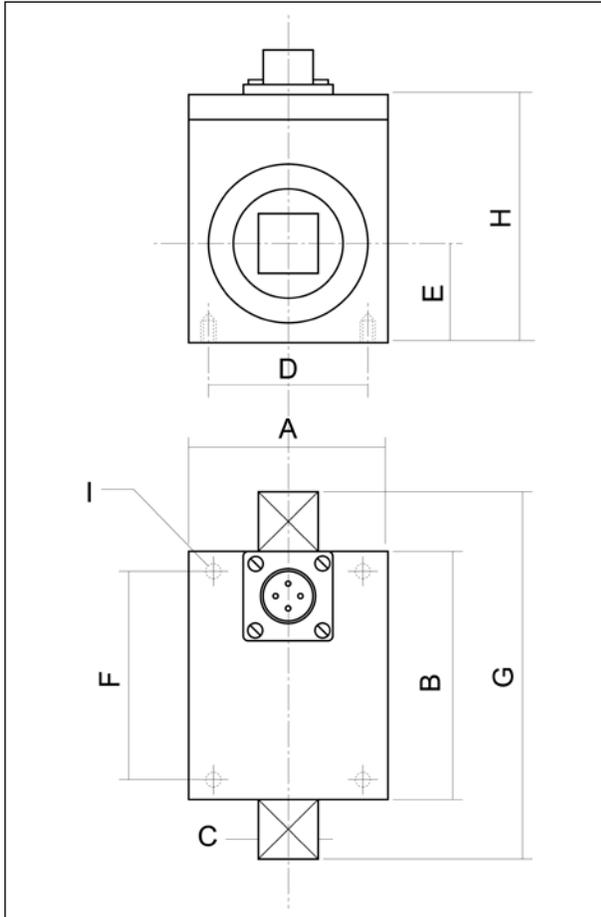


Wiring Schematic


CD1050



CD1050-A1

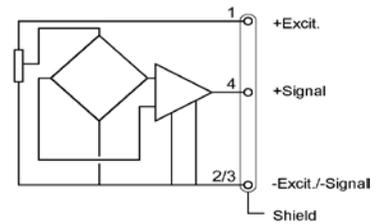

CD1050-A2

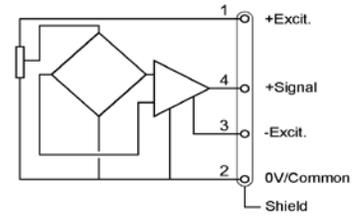

Dimensions in mm [inch]

F.S. in Nm [lbf.ft]	5 - 10 - 20 - 50 - 100 [4 - 8 - 16 - 40 - 80]		150 - 200 - 300 [120 - 160 - 240]		500 - 750 [400 - 600]		1k - 2k - 3k [800 - 1,6k - 2,4k]		4k - 5k - 7k [3,2k - 4k - 5,6k]	
A	40	[1.57]	50	[1.97]	60	[2.36]	80	[3.15]	105	[4.13]
B	50	[1.97]	55	[2.17]	60	[2.36]	75	[2.95]	80	[3.15]
C	12.7	[0.50]	19	[0.75]	25.4	[1.00]	38.1	[1.50]	50.8	[2.00]
D	32	[1.26]	40	[1.57]	50	[1.97]	70	[2.76]	95	[3.74]
E	20	[0.79]	25	[0.98]	30	[1.18]	40	[1.57]	52.5	[2.07]
F	42	[1.65]	45	[1.77]	50	[1.97]	65	[2.56]	70	[2.76]
G	80	[3.15]	105	[4.13]	120	[4.72]	160	[6.30]	190	[7.48]
H	50	[1.97]	60	[2.36]	70	[2.76]	90	[3.54]	115	[4.53]
I	4 x M3		4 x M3		4 x M4		4 x M4		4 x M4	

CD1050 Dynamic Rotary Torque Sensor

OPTIONS


A1 : Amplified Tension output with unipolar power supply

A2 : Amplified Tension output with bipolar power supply

PE : Cable Gland Termination with 2 m [6.6 ft] cable

ORDERING INFO

CD1050 - A1 - 7KNm - /ET1/PE

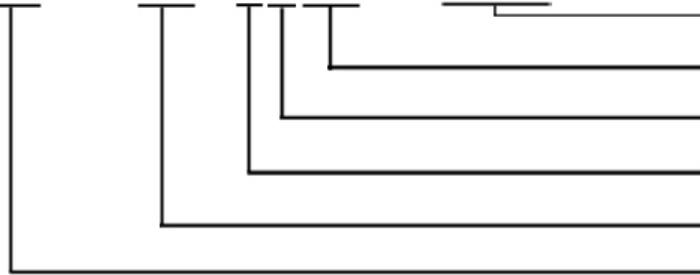

Other Options (ET1, PE, etc.)

Unit (Nm=(Newton)(meter))

Multiplier (K for ranges >1000)

Range

Power Supply Reference (None, A1, or A2)

Model

NORTH AMERICA

Measurement Specialties, Inc.
Vibration Design Center
32 Journey - Suite 150
Aliso Viejo, CA 92656
United States USA
Tel: 1-949-716-0877
Fax: 1-949-916-5677
t&m@meas-spec.com

EUROPE

Measurement Specialties
(Europe), Ltd.
26 Rue des Dames
78340 Les Clayes-Sous-Bois,
France
Tel: +33 (0) 130 79 33 00
Fax: +33 (0) 134 81 03 59
pfg.cs.emea@meas-spec.com

ASIA

Joint Sensor Instruments Ltd.
Lane 1 Anhua Industrial Zone
Shenzhen, PN 518000
China
Tel: +86(0) 755 2744 3931
Fax: +86(0) 755 8311 6697
sensor@szjoint.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.